

Emergency Telephones

www.emergencytelephones.com.au

Wireless Hand-Free Emergency call telephone
Model: ETEM-21

**GSM TELEPHONE
SOLAR POWERED**




Main Features:

1. GSM/ VOIP/PSTN optional
2. Metal body, solid and temperature bearable
3. Handset free, loudspeaker,
4. Heavy duty Vandal resistant buttons.
5. With or without keypad optional
6. Lightning protection standard to ITU-T K21
7. Waterproof grade about IP55
8. Body with grounding connection protection
9. Support hotline call, self stop if the other side hang up.
10. Built-in loud speaker, noise canceling microphone
11. Lighting will flash when there is a incoming call
12. AC 110v/220v powered or built-in rechargeable battery with solar powered panel optional
13. The design is super thin and smart. Embed style and hanging style can be chosen.
14. Time out function optional
15. Colours: RED + Stainless steel , If the qty over 100pcs can be To customer specification

Sales and Service:

Emergency Telephones

PO Box 606 Rockdale NSW 2216
Telephone: 02-9599-9555
Fax: 02-9599-9225
Email: sales@emergencytelephones.com.au
service@emergencytelephones.com.au

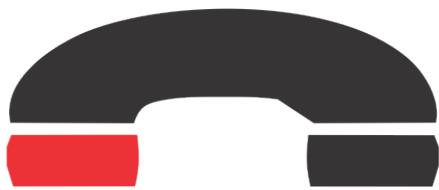

Emergency Telephones

www.emergencytelephones.com.au


Applications:

As a Public telephone for outdoor, Taxi or bus stands or station, Highway call box. Railway, Port, Dock, Generation facilities....A good ideal telephone for use in wet or corrosive atmospheres

Specification:

1. **Network Interface:** GSM Frequency : 850/900/1800/1900MHZ
2. **Ringing:** Through internal Speaker/ringer
3. **Power Supply:** Re-chargeable Battery powered: 9V/14Ah, Solar back-up: 12V/30W
4. **Time out:** selectable 0-20 minutes
5. **Temperature:** -20°C ~ +60°C emp
6. **Relative Humidity:** up to 90%
7. **Built-in battery Standby:** 21days
8. **Built-in battery talking time:** 21 hours

Telephone layout

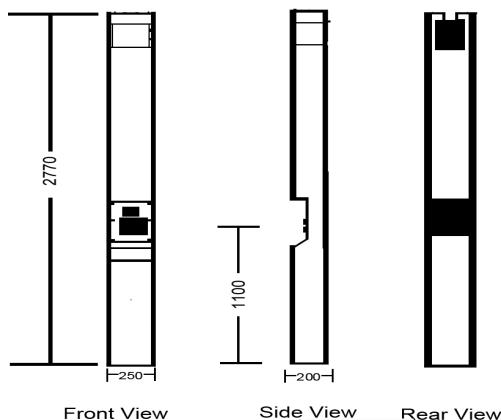

Solar panel over 600mm high

1.5 Certification:



EMC: EN50121 (Railway application- Electromagnetic Compatibility)

EN55022: emissions EN55024: immunity

Ingress Protection: GB4208-93 IP67

FCC

ITU-T Recommendations K21

Telephone Unit size: 2770*250*200mm Unit Net weight: 160kg

1pcs in each inner CTN box, size: 350X530X4600 G.W: 170kg

20GP: 32PCS 40GP: 65PCS 40HQ: 80PCS

EMERGENCY TELEPHONES HAVE A COMPLETE BACK UP SERVICE
SUCH AS TECHNICALLY QUALIFIED TECHNICIANS AND A MODERN
WORKSHOP FACILITY WHICH INCLUDES ALL PARTS AND ACCESSORIES.

IF WE CAN ASSIST YOU WITH FURTHER INFORMATION OR BROCHURES
PLEASE DONT HESITATE TO CONTACT US.

Sales and Service:

Emergency Telephones

PO Box 606 Rockdale NSW 2216
Telephone: 02-9599-9555
Fax: 02-9599-9225
Email: sales@emergencytelephones.com.au
service@emergencytelephones.com.au